


LGMG

AR11J

ARTICULATING BOOM LIFT

- 270kg large platform capacity design maximises productivity.
- Motion squawker, dual pole battery and starter isolators as standard.
- Powerful axle-integrated four-wheel drive system.
- Full-time floating axle significantly improves rough terrain capability and ground clearance.
- Advanced proportional electronic control system for easy diagnostics as well as accurate positioning and smooth operation.

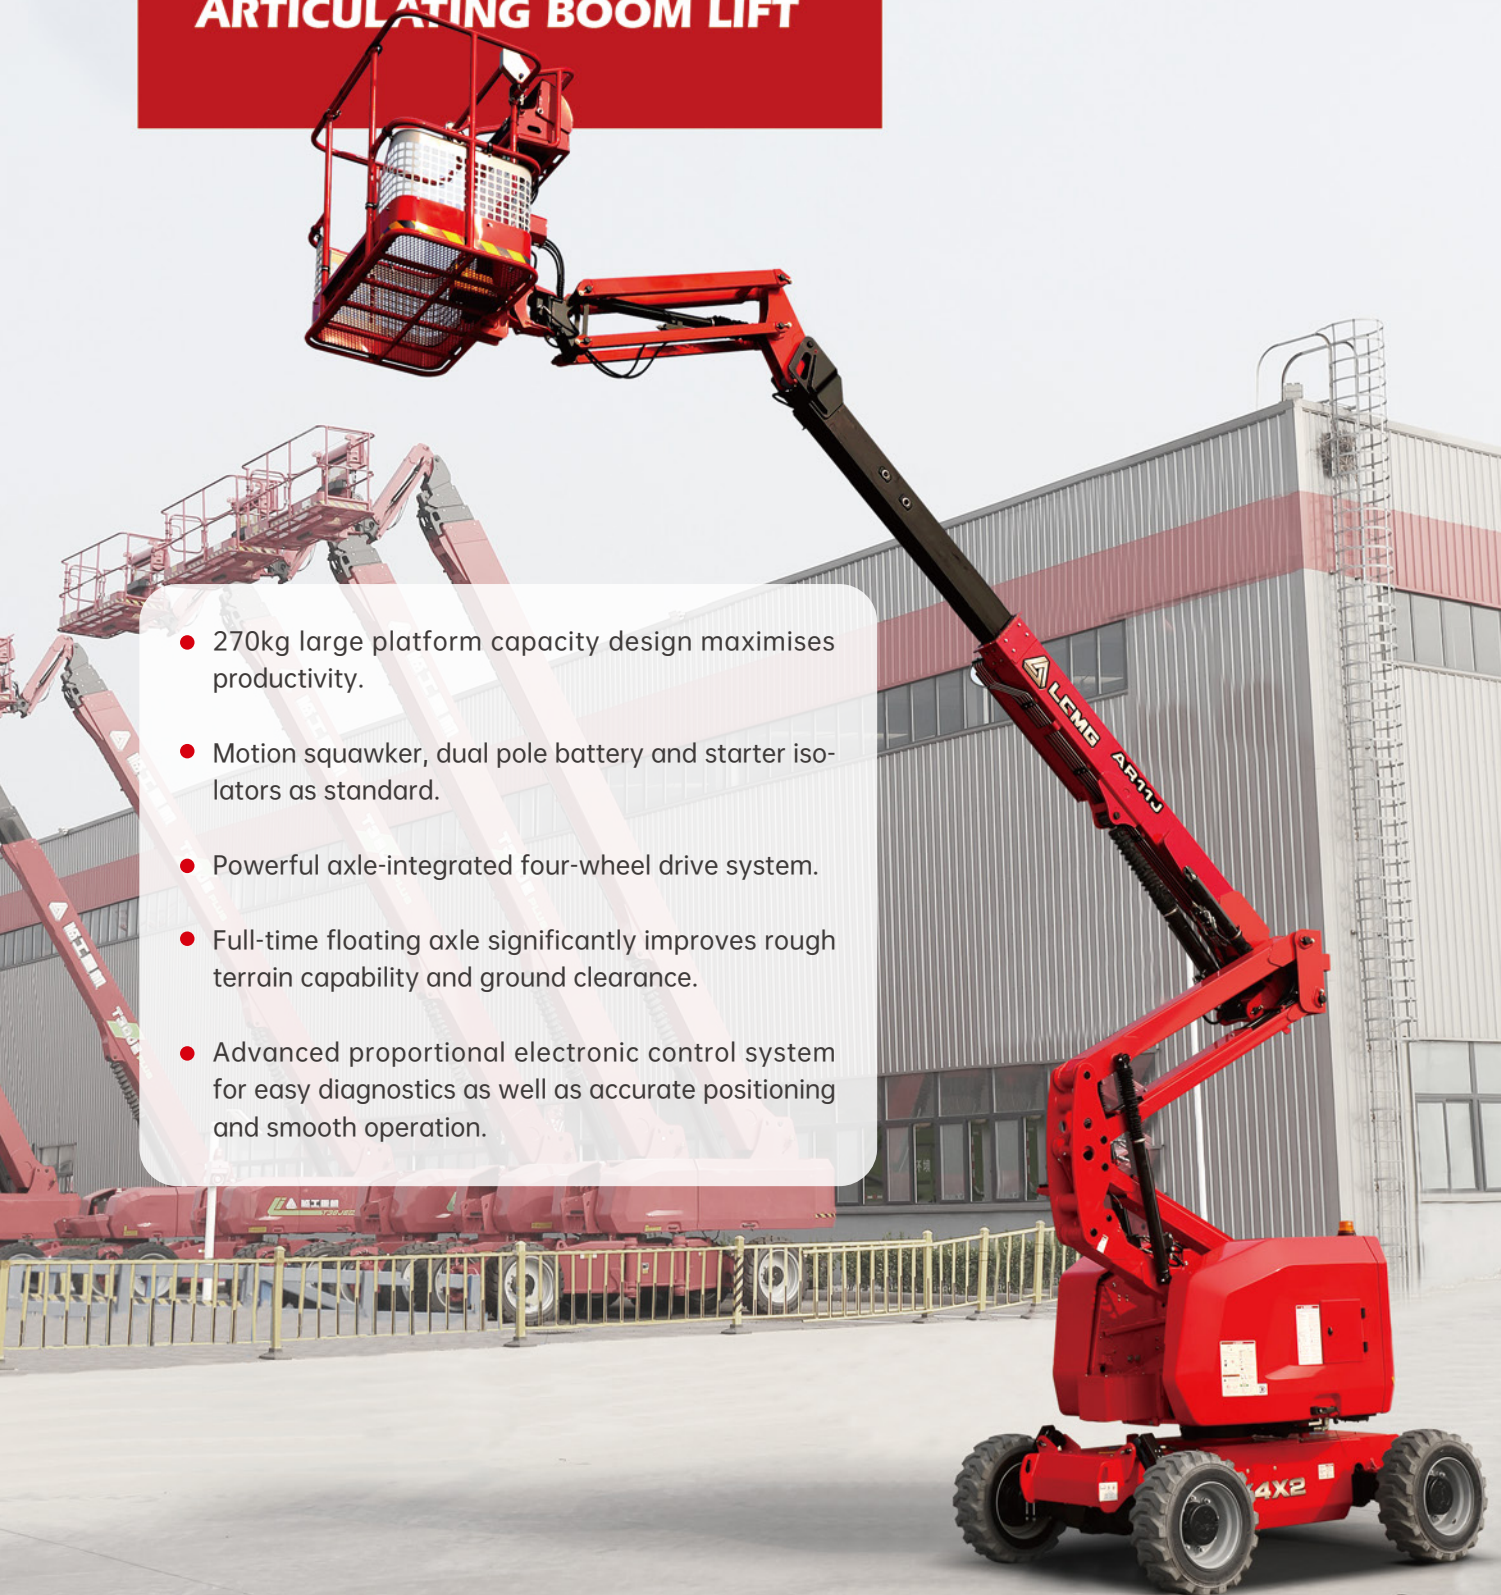

LGMG Diesel - Articulating Boom Lift

SPECIFICATIONS

| MODELS | AR11J |
|-------------------------------|--------|
| Measurements | Metric |
| Work Height Max. | 12.75m |
| Platform Height Max. | 10.75m |
| Horizontal Outreach | 6.78m |
| Up and Over Height | 5.32m |
| Platform Length | 1.42m |
| Platform Width | 0.76m |
| A Stowed Length | 5.77m |
| Length-Transport (jib tucked) | 4.46m |
| B Overall Width | 1.85m |
| C Stowed Height | 2.06m |
| Height-Transport | 2.29m |
| D Wheelbase | 1.88m |
| E Ground Clearance | 0.19m |

PRODUCTIVITY

| | |
|-------------------------|-------------------------|
| Max. Platform Occupancy | 2 |
| Platform Capacity | 270kg |
| Turntable Rotation | 355° |
| Drive Speed-Stowed | 5km/h |
| Drive Speed-Raised | 0.8km/h |
| Gradeability | 45% |
| Max. Wind Speed | 12.5m/s |
| Turning Radius-Inside | 2.6m |
| Turning Radius-Outside | 4.7m |
| Max.Slope | 3°/4.5° |
| Tires Type | Foam-filled non-marking |
| Tires Models | 10-16.5 |

POWER

| | |
|--------------------|---------------------|
| Power Source | Kubota D1105 18.2kW |
| Fuel Tank Capacity | 40L |

HYDRAULIC SYSTEM

| | |
|----------------------|-----|
| Hydraulic Oil Volume | 58L |
|----------------------|-----|

WEIGHT




| | |
|----------------|---------|
| Machine Weight | 5,400kg |
|----------------|---------|

STANDARD FEATURES

| | |
|---------------------------|---|
| Proportional control | Foam-filled non-marking tires |
| Horn/Hour meter | Platform control cover |
| Emergency stop device | Overload sensing system |
| Auto-leveling platform | Intelligent diagnostic system |
| Anti-collision protection | Oscillating axle |
| Full-height drive | Telematics connector |
| Flashing beacons | Over tilt protection system |
| Cylinder bellows | Battery isolator switch (double pole) |
| Squawker alarm | Start motor isolator switch (double pole) |
| Half-height mesh platform | |

OPTIONAL

| | |
|----------------------|-----------------------------|
| AC power to platform | RT Foam-filled tires |
| Telematics | Solid tires |
| Auxiliary rail | Solid non-marking tires |
| Platform tool box | Biodegradable hydraulic oil |

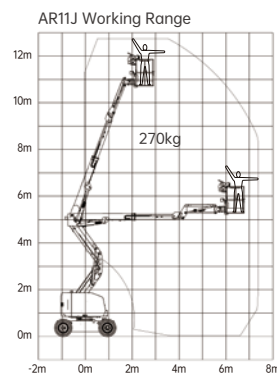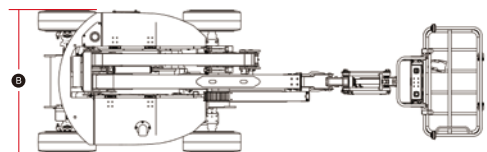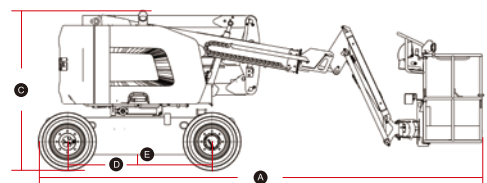

Please contact LGMG or a local dealer for more details.
LGMG reserves the right to change technical data without prior notice. All photos and pictures in this brochure are for promotional purposes only.
This model is only available for the Australian market.

LINGONG HEAVY MACHINERY CO., LTD.

Address: No. 2676, Kejia Road, Jinan, Shandong, China
Email: sales@lmg.com.cn Tel: +86 531 6787 9283

LGMG Machinery Australia Pty Ltd

Address: 27 Broadhurst Road, Ingleburn, NSW 2565
Email: kevan.jarvis@lmg.com.au Tel: +61 499 685 544

www.lmglifts.com

 **LGMG**
RELIABILITY IN ACTION